


Tension and Compression Load Cell ME-8810



Feature:

- ◆ Adopt high-precision resistance strain principle;
- ◆ Meet force measurement in the range of 5 N to 50 N;
- ◆ Stainless steel material with sealed welding, oil, water, corrosion resistant;
- ◆ S structural design, pressure-bearing, easy to install;
- ◆ Safe and suitable for harsh environments and dangerous situations;
- ◆ High dynamic response frequency;
- ◆ Small size, good appearance

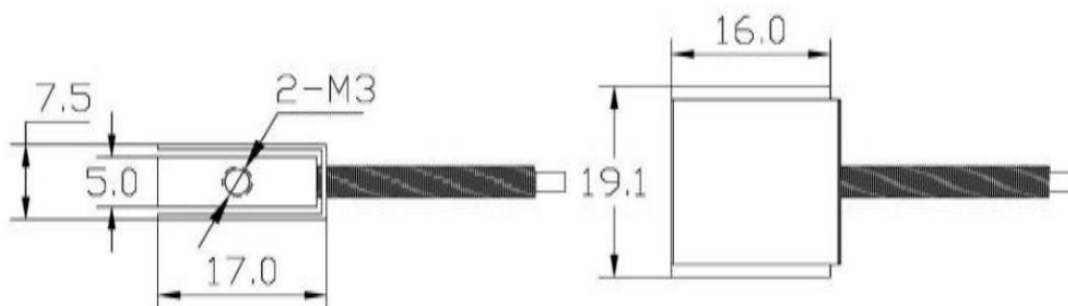


Technical parameters:


Measuring range:	0 ~ (5 N to 50 N) (0.5 kg to 5 kg)	Material:	Stainless steel
Accuracy:	0.05 % FSO	Rated output:	2.0 mV/V
Nominal excitation:	2.5 ~ 5 VDC	Maximum excitation:	10 V
Natural frequency:	≥ 2 kHz	Compensated temperature range:	- 10 ~ 60 °C
Hysteresis:	0.05 % FSO	Operating temperature range:	- 20 ~ 100 °C
Repeatability:	0.03 % FSO	Insulation:	≥ 5000 MΩ / 100 VDC
Input impedance:	350 (700) ± 5 Ω	Output impedance:	350 (700) ± 5 Ω
Creep (30 min):	0.01 % FSO	Temperature effect on output:	0.05 % FSO / 10 °C
Zero balance:	± 2 % FSO	Temperature effect on zero:	0.05 % FSO / 10 °C
Safe load limit:	150 %	Ultimate load limit:	500 %
Cable size:	Ø 3 x 3m	Life time:	Full scale more than 1 million times

Wire connection:	Power supply E+: Red; Power supply E-: Black; Signal S+: Green; Signal S-: White	
------------------	--	--

Loading mode:



Wiring diagram:

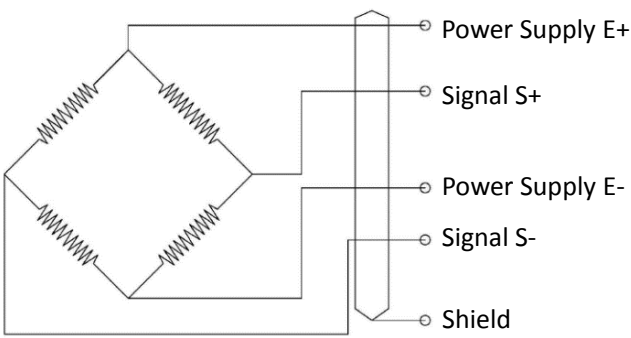

Order Instruction:


Load Cell

Measuring Range (N)

5	10	20	50
5	10	20	50


Cable Length (m)

3 meter length	5 meter length
L3	L5

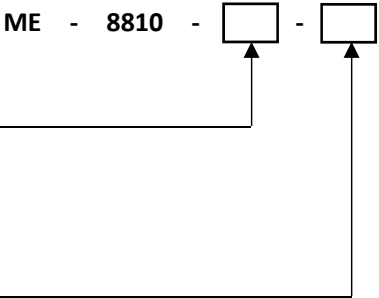


* Dimension and measuring range can be customized by request.

Tension and Compression Load Cell ME-8820

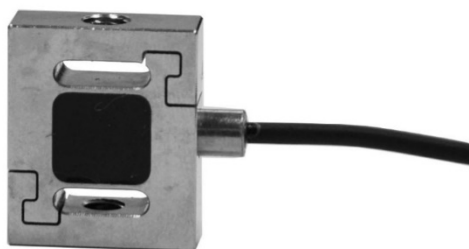

Feature:

- ◆ Adopt high-precision resistance strain principle;
- ◆ Meet force measurement in the range of 50 N to 2 kN;
- ◆ Stainless steel material with sealed welding, oil, water, corrosion resistant;
- ◆ S structural design, pressure-bearing, easy to install;
- ◆ Safe and suitable for harsh environments and dangerous situations;
- ◆ High dynamic response frequency;
- ◆ Small size, good appearance

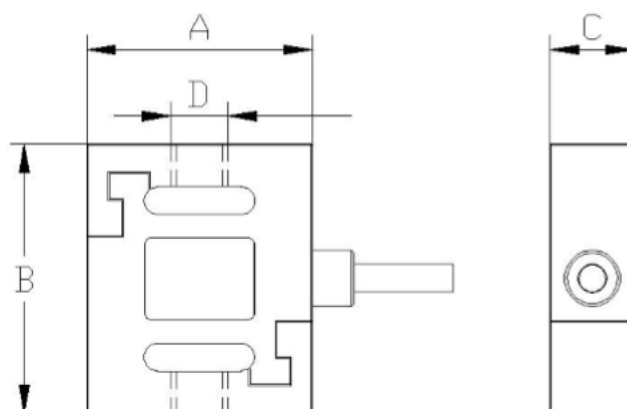


Range	A	B	C	D
50 N to 500 N	16	19.1	6	M4
700 N to 2 kN	26	40	12	M8


Technical parameters:

Measuring range:	0 ~ (50 N to 2 kN) (5 kg to 200 kg)	Material:	Stainless steel
Accuracy:	0.05 % FSO	Rated output:	2.0 mV/V
Nominal excitation:	2.5 ~ 5 VDC	Maximum excitation:	10 V
Natural frequency:	≥ 5 kHz	Compensated temperature range:	- 10 ~ 60 °C
Hysteresis:	0.05 % FSO	Operating temperature range:	- 20 ~ 80 °C
Repeatability:	0.03 % FSO	Insulation:	≥ 5000 MΩ / 100 VDC
Input impedance:	350 (700) ± 5 Ω	Output impedance:	350 (700) ± 5 Ω
Creep (30 min):	0.01 % FSO	Temperature effect on output:	0.05 % FSO / 10 °C
Zero balance:	± 2 % FSO	Temperature effect on zero:	0.05 % FSO / 10 °C
Safe load limit:	150 %	Ultimate load limit:	500 %
Cable size:	Ø 2 x 3m	Life time:	Full scale more than 1 million times
Wire connection:	Power supply E+: Red; Power supply E-: Black; Signal S+: Green; Signal S-: White		

Loading mode:



Wiring diagram:

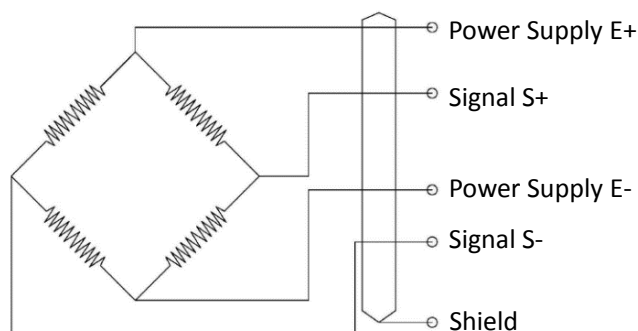

Order Instruction:

Load Cell

Measuring Range (N)

50	100	200	500	1000	2000
50	100	200	500	1K	2K

Cable Length (m)

3 meter length	5 meter length
L3	L5

ME - 8820 - -


* Dimension and measuring range can be customized by request.

Tension and Compression Load Cell ME-8840

Feature:



- ◆ Adopt high-precision resistance strain principle;
- ◆ Meet force measurement in the range of 500 N to 2 kN;
- ◆ Stainless steel material with sealed welding, oil, water, corrosion resistant;
- ◆ S structural design, pressure-bearing, easy to install;
- ◆ Safe and suitable for harsh environments and dangerous situations;
- ◆ High dynamic response frequency;
- ◆ Small size, good appearance

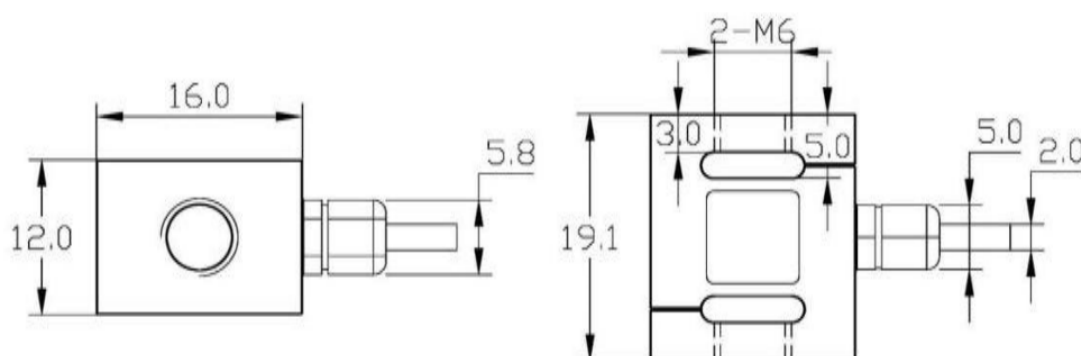


Technical parameters:


Measuring range:	0 ~ (500 N to 2 kN) (50 kg to 200 kg)	Material:	Stainless steel
Accuracy:	0.05 % FSO	Rated output:	2.0 mV/V
Nominal excitation:	2.5 ~ 5 VDC	Maximum excitation:	10 V
Natural frequency:	≥ 5 kHz	Compensated temperature range:	- 10 ~ 60 °C
Hysteresis:	0.05 % FSO	Operating temperature range:	- 20 ~ 80 °C
Repeatability:	0.03 % FSO	Insulation:	≥ 5000 MΩ / 100 VDC
Input impedance:	350 (700) ± 5 Ω	Output impedance:	350 (700) ± 5 Ω
Creep (30 min):	0.01 % FSO	Temperature effect on output:	0.05 % FSO / 10 °C
Zero balance:	± 2 % FSO	Temperature effect on zero:	0.05 % FSO / 10 °C

Safe load limit:	150 %	Ultimate load limit:	500 %
Cable size:	Ø 3 x 3m	Life time:	Full scale more than 1 million times
Wire connection:	Power supply E+: Red; Power supply E-: Black; Signal S+: Green; Signal S-: White		

Loading mode:



Wiring diagram:

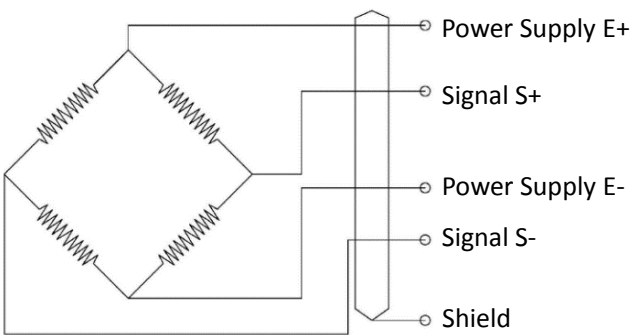

Order Instruction:


Load Cell

Measuring Range (N)

500	1000	2000
500	1K	2K


Cable Length (m)

3 meter length	5 meter length
L3	L5

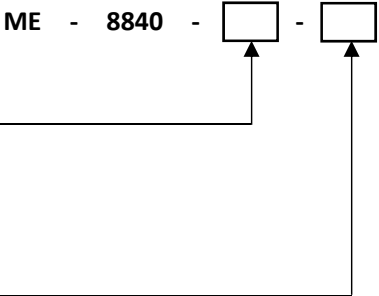


* Dimension and measuring range can be customized by request.

Tension and Compression Load Cell ME-8850

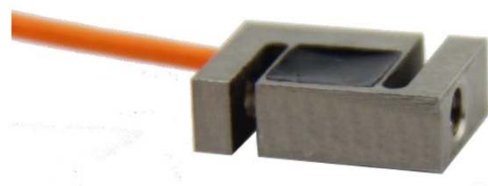

Feature:

- ◆ Adopt high-precision resistance strain principle;
- ◆ Meet force measurement in the range of 10 N to 200 N;
- ◆ Stainless steel material with sealed welding, oil, water, corrosion resistant;
- ◆ S structural design, pressure-bearing, easy to install;
- ◆ Safe and suitable for harsh environments and dangerous situations;
- ◆ High dynamic response frequency;
- ◆ Small size, good appearance

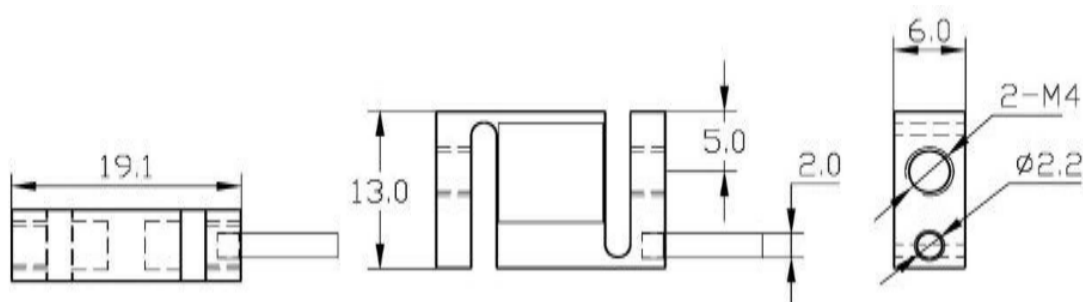


Technical parameters:


Measuring range:	0 ~ (10 N to 200 N) (1 kg to 20 kg)	Material:	Stainless steel
Accuracy:	0.05 % FSO	Rated output:	2.0 mV/V
Nominal excitation:	2.5 ~ 5 VDC	Maximum excitation:	10 V
Natural frequency:	≥ 2 kHz	Compensated temperature range:	- 10 ~ 60 °C
Hysteresis:	0.05 % FSO	Operating temperature range:	- 20 ~ 80 °C
Repeatability:	0.03 % FSO	Insulation:	≥ 5000 MΩ / 100 VDC
Input impedance:	350 (700) ± 5 Ω	Output impedance:	350 (700) ± 5 Ω
Creep (30 min):	0.01 % FSO	Temperature effect on output:	0.05 % FSO / 10 °C
Zero balance:	± 2 % FSO	Temperature effect on zero:	0.05 % FSO / 10 °C
Safe load limit:	150 %	Ultimate load limit:	500 %

Cable size:	Ø 2 x 3m	Life time:	Full scale more than 1 million times
Wire connection:	Power supply E+: Red; Power supply E-: Black; Signal S+: Green; Signal S-: White		

Loading mode:



Wiring diagram:

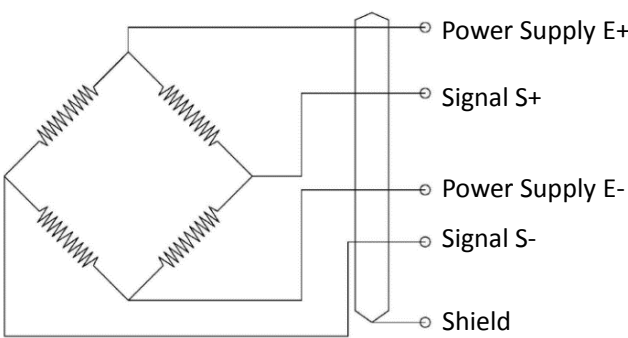

Order Instruction:


Load Cell

Measuring Range (N)

10	20	50	100	200
10	20	50	100	200

Cable Length (m)

3 meter length	5 meter length
L3	L5

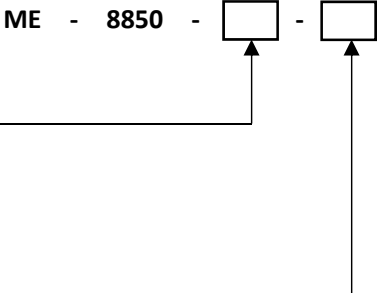


* Dimension and measuring range can be customized by request.

Tension and Compression Load Cell ME-8860



Feature:

- ◆ Adopt high-precision resistance strain principle;
- ◆ Meet force measurement in the range of 10 N to 200 N;
- ◆ Stainless steel material with sealed welding, oil, water, corrosion resistant;
- ◆ S structural design, pressure-bearing, easy to install;
- ◆ Safe and suitable for harsh environments and dangerous situations;
- ◆ High dynamic response frequency;
- ◆ Small size, good appearance

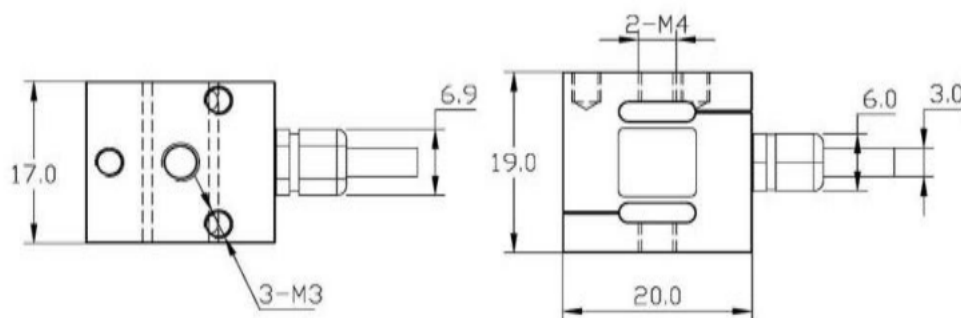


Technical parameters:


Measuring range:	0 ~ (10 N to 200 N) (1 kg to 20 kg)	Material:	Stainless steel
Accuracy:	0.05 % FSO	Rated output:	2.0 mV/V
Nominal excitation:	2.5 ~ 5 VDC	Maximum excitation:	10 V
Natural frequency:	≥ 1 kHz	Compensated temperature range:	- 10 ~ 60 °C
Hysteresis:	0.05 % FSO	Operating temperature range:	- 20 ~ 80 °C
Repeatability:	0.03 % FSO	Insulation:	≥ 5000 MΩ / 100 VDC
Input impedance:	350 (700) ± 5 Ω	Output impedance:	350 (700) ± 5 Ω
Creep (30 min):	0.01 % FSO	Temperature effect on output:	0.05 % FSO / 10 °C
Zero balance:	± 2 % FSO	Temperature effect on zero:	0.05 % FSO / 10 °C

Safe load limit:	150 %	Ultimate load limit:	200 %
Cable size:	Ø 3 x 3m	Life time:	Full scale more than 1 million times
Wire connection:	Power supply E+: Red; Power supply E-: Black; Signal S+: Green; Signal S-: White		

Loading mode:



Wiring diagram:

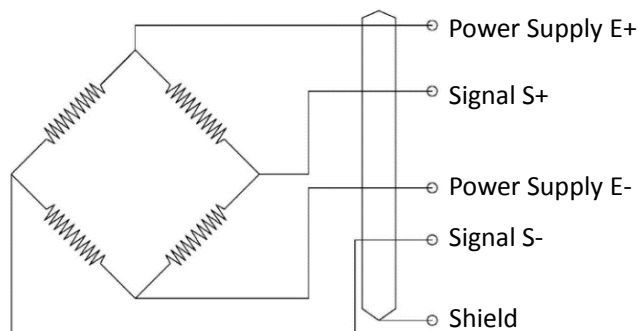

Order Instruction:

Load Cell

ME - 8860 - -

Measuring Range (N)


10	20	50	100	200
10	20	50	100	200

Cable Length (m)

3 meter length	5 meter length
L3	L5


* Dimension and measuring range can be customized by request.

Tension and Compression Load Cell ME-8870

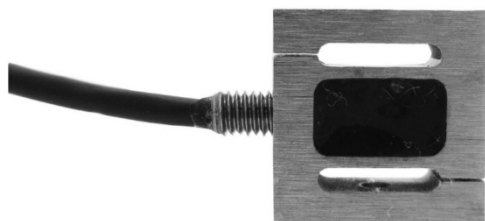

Feature:

- ◆ Adopt high-precision resistance strain principle;
- ◆ Meet force measurement in the range of 5 N to 100 N;
- ◆ Stainless steel material with sealed welding, oil, water, corrosion resistant;
- ◆ S structural design, pressure-bearing, easy to install;
- ◆ Safe and suitable for harsh environments and dangerous situations;
- ◆ High dynamic response frequency;
- ◆ Small size, good appearance

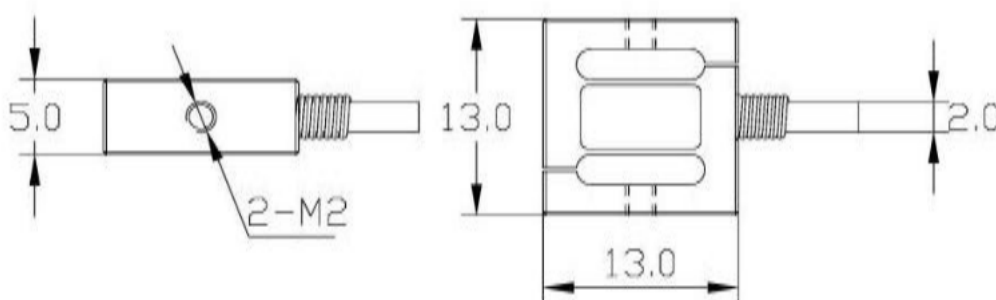


Technical parameters:


Measuring range:	0 ~ (5 N to 100 N) (0.5 kg to 10 kg)	Material:	Stainless steel
Accuracy:	0.03 % FSO	Rated output:	2.0 mV/V
Nominal excitation:	2.5 ~ 5 VDC	Maximum excitation:	10 V
Natural frequency:	≥ 5 kHz	Compensated temperature range:	- 10 ~ 60 °C
Hysteresis:	0.05 % FSO	Operating temperature range:	- 20 ~ 80 °C
Repeatability:	0.03 % FSO	Insulation:	≥ 5000 MΩ / 100 VDC
Input impedance:	350 (700) ± 5 Ω	Output impedance:	350 (700) ± 5 Ω
Creep (30 min):	0.01 % FSO	Temperature effect on output:	0.05 % FSO / 10 °C
Zero balance:	± 2 % FSO	Temperature effect on zero:	0.05 % FSO / 10 °C
Safe load limit:	150 %	Ultimate load limit:	200 %

Cable size:	Ø 3 x 3m	Life time:	Full scale more than 1 million times
Wire connection:	Power supply E+: Red; Power supply E-: Black; Signal S+: Green; Signal S-: White		

Loading mode:



Wiring diagram:

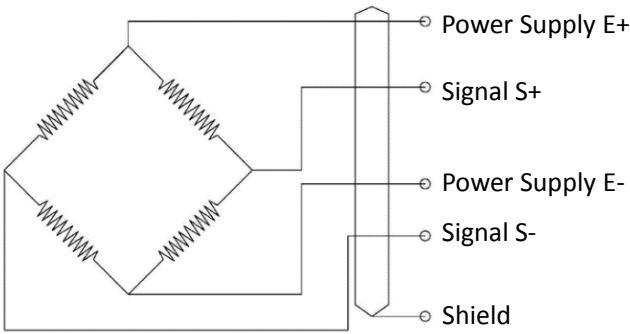

Order Instruction:


Load Cell

Measuring Range (N)

5	10	20	50	100
5	10	20	50	100

Cable Length (m)

3 meter length	5 meter length
L3	L5

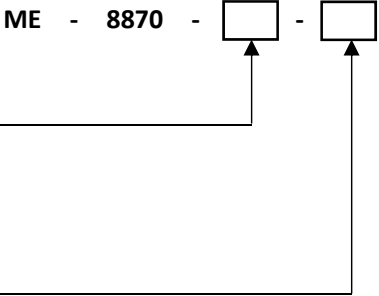


* Dimension and measuring range can be customized by request.

Tension and Compression Load Cell ME-8890



Feature:

- ◆ Adopt high-precision resistance strain principle;
- ◆ Meet force measurement in the range of 10 N to 2 kN;
- ◆ Stainless steel material with sealed welding, oil, water, corrosion resistant;
- ◆ S structural design, pressure-bearing, easy to install;
- ◆ Safe and suitable for harsh environments and dangerous situations;
- ◆ High dynamic response frequency;
- ◆ Small size, good appearance

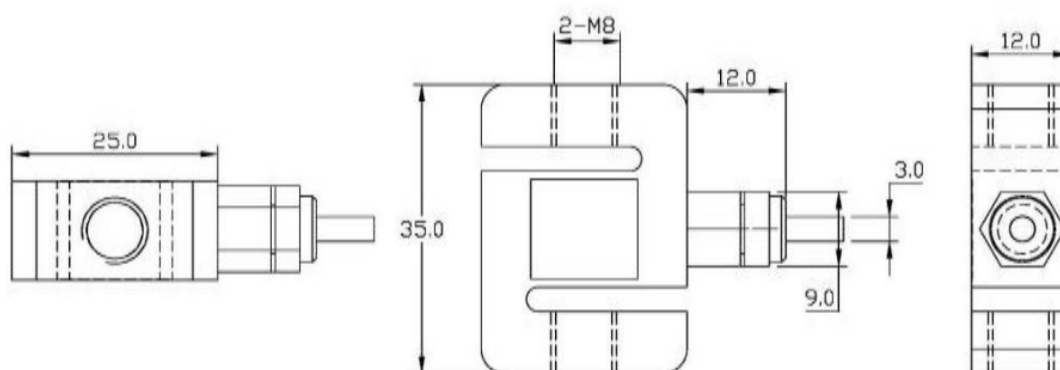


Technical parameters:


Measuring range:	0 ~ (10 N to 2 kN) (1 kg to 200 kg)	Material:	Stainless steel
Accuracy:	0.05 % FSO	Rated output:	2.0 mV/V
Nominal excitation:	2.5 ~ 5 VDC	Maximum excitation:	10 V
Natural frequency:	≥ 2 kHz	Compensated temperature range:	- 10 ~ 60 °C
Hysteresis:	0.05 % FSO	Operating temperature range:	- 20 ~ 80 °C
Repeatability:	0.03 % FSO	Insulation:	≥ 5000 MΩ / 100 VDC
Input impedance:	350 (700) ± 5 Ω	Output impedance:	350 (700) ± 5 Ω
Creep (30 min):	0.01 % FSO	Temperature effect on output:	0.05 % FSO / 10 °C

Zero balance:	$\pm 2 \% \text{ FSO}$	Temperature effect on zero:	$0.05 \% \text{ FSO} / 10 ^\circ \text{C}$
Safe load limit:	150 %	Ultimate load limit:	500 %
Cable size:	$\varnothing 2 \times 3\text{m}$	Life time:	Full scale more than 1 million times
Wire connection:	Power supply E+: Red; Power supply E-: Black; Signal S+: Green; Signal S-: White		

Loading mode:



Wiring diagram:

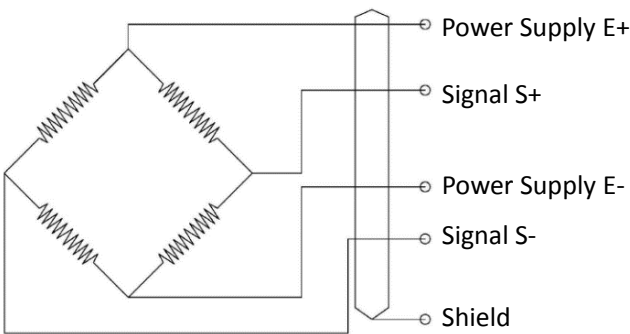

Order Instruction:


Load Cell

Measuring Range (N)

10	20	50	100	200	500	1000	2000
10	20	50	100	200	500	1K	2K

Cable Length (m)

3 meter length	5 meter length
L3	L5

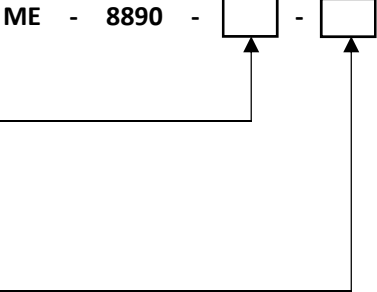

* Dimension and measuring range can be customized by request.